ZS3-320E Automatic triangle packing machine



APPLICATION:

Supply in medicament, foodstuff industry for wafer or cream etc liquid material packed in triangle pouch.

FUNCTION:

This machine gathers the series of bag making, filling, counting, sealing, cutting and feeding out automatically to complete.

CHARACTERISTICS:

1. This machine collects mechanical and electrical in together, adopts CPU microcomputer control system, and in Chinese, English automatic switching demonstration

2. Adopts the microcomputer to control the photocell track system, and also collocate the high accuracy step-to-step electrical motor to precise the identical position of each pouch design; the control system completes the


synchronization, fixed-length and the localization, and also diagnose the malfunction automatically of the whole machine.

3. The adjustable shaking force of the material plate to be more exact for the different measurement.

4. May choose the fittings: the code machine, inflate device or deflate device.

Performance:

Packing Shape: The picture is triangle seal bag sample which we have made for our other customer before.

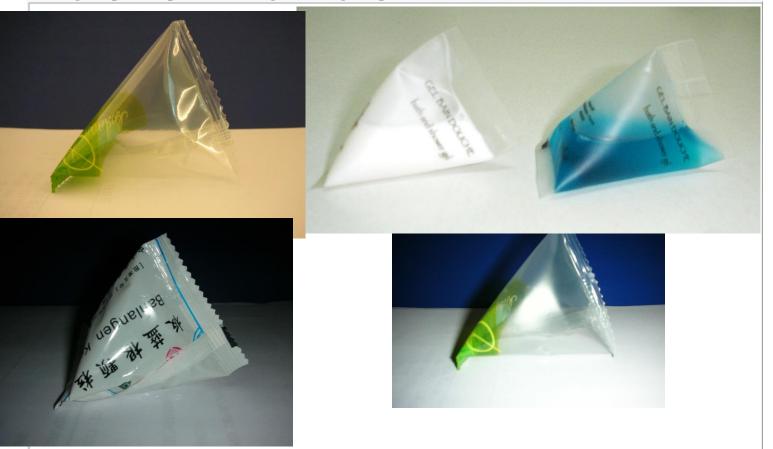

Technical Parameter			
Packing speed	35-70bag/min	Max width of film (mm)	230
	L:10-150 (adjustable)		
Size of making bag (mm)	W:40-80 (need change the	Voltage(VAC)	220(or 380V)
	bag former)		
capacity	30ml-300ml	Machine weight (kg)	350
Total power (kw)	1.8	Machine size (mm)	1200×800×1900

May change above technical parameter preperly as per clients' requirements